




PUR Sealer

TWO-COMPONENT URETHANE SEALER

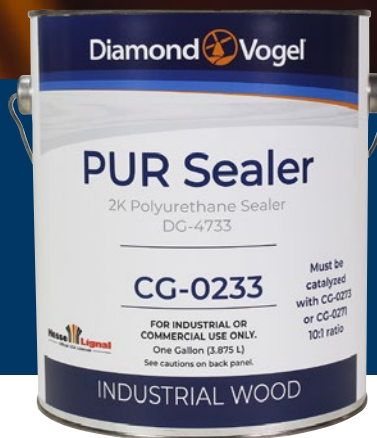

PUR Sealer is a two-component acrylic urethane sealer that is easily absorbed, fills grains with ease, and forms a strong bond between the wood and PUR finishes.

For use on interior wood surfaces including kitchens and bathrooms. For a filled or closed pore appearance under MultiPUR or ElitePUR two-component polyurethane topcoats.



PUR Sealer Two-Component Urethane

PUR Sealer utilizes advanced European resin technologies to deliver an exceptional coating that is easy to work with while performing at a high level.

FEATURES

- Provides exceptional adhesion and sandability
- Added protection against fading and yellowing
- High solids product with quick dry time

FIELD OF APPLICATION

For wood surfaces, kitchen cabinets, store fixtures, furniture, and fine architectural woodwork.

PHYSICAL PROPERTIES

Weight:	8.0 lb/gal
Viscosity at 77°F:	30 to 35 seconds #2 Zahn
Solids Weight:	33%
Solids Volume:	27%
Theoretical Coverage:	433 sq. ft./gal after catalyzing
Flash Point:	81°F
Gloss at 60° :	Dull Satin = 28 to 32
Catalyst:	CG-0273 (10:1 Mix Ratio)

* For VOC information see Technical Data Sheet



38953-DV (50292) 12/20



INDUSTRIAL
WOOD COATINGS

710 Forest Avenue • Sheboygan Falls, WI 53085
(920) 467-7850
diamondvogel.com/industrialwood