

Diamond  Vogel®

EuroVar®

CONVERSION VARNISH



EuroVar is a two-component high solids conversion varnish that offers superior quality for wood finishes.

For use on interior wood surfaces, kitchen cabinets, restaurant and store fixtures, furniture, and fine architectural woodwork.



EuroVar® Conversion Varnish

EuroVar is a two-component water-white, clear conversion varnish developed from advanced European resin technology. EuroVar provides excellent resistance to yellowing and is recommended for use over white, pickled, and light colored stains where good resistance to yellowing is required.

FEATURES

- Fast dry and stacking times
- Superior resistance to abrasion, water, staining, household chemicals, and body oils
- Special resins with ultra violet absorbers to resist yellowing upon aging
- Self-sealing, "multi-coat" technology eliminates the need for a separate sealer product


FIELD OF APPLICATION

- Wood surfaces
- Kitchen cabinets
- Restaurant and store fixtures
- Furniture
- Fine architectural woodwork

PHYSICAL PROPERTIES

| | |
|-----------------------|--|
| Weight: | 7.8 lb/gal |
| Viscosity at 77°F: | 20 to 22 seconds #2 Zahn |
| Solids Weight: | 36% |
| Solids Volume: | 29% |
| Theoretical Coverage: | 353 sq. ft./gal |
| Flash Point: | 41°F |
| Gloss at 60° : | Gloss = 50 to 55 Semi-Gloss = 40 to 50 Satin = 30 to 35 Dull Satin = 20 to 25 Flat = 5 to 10 |

* For VOC information, see Technical Data Sheet

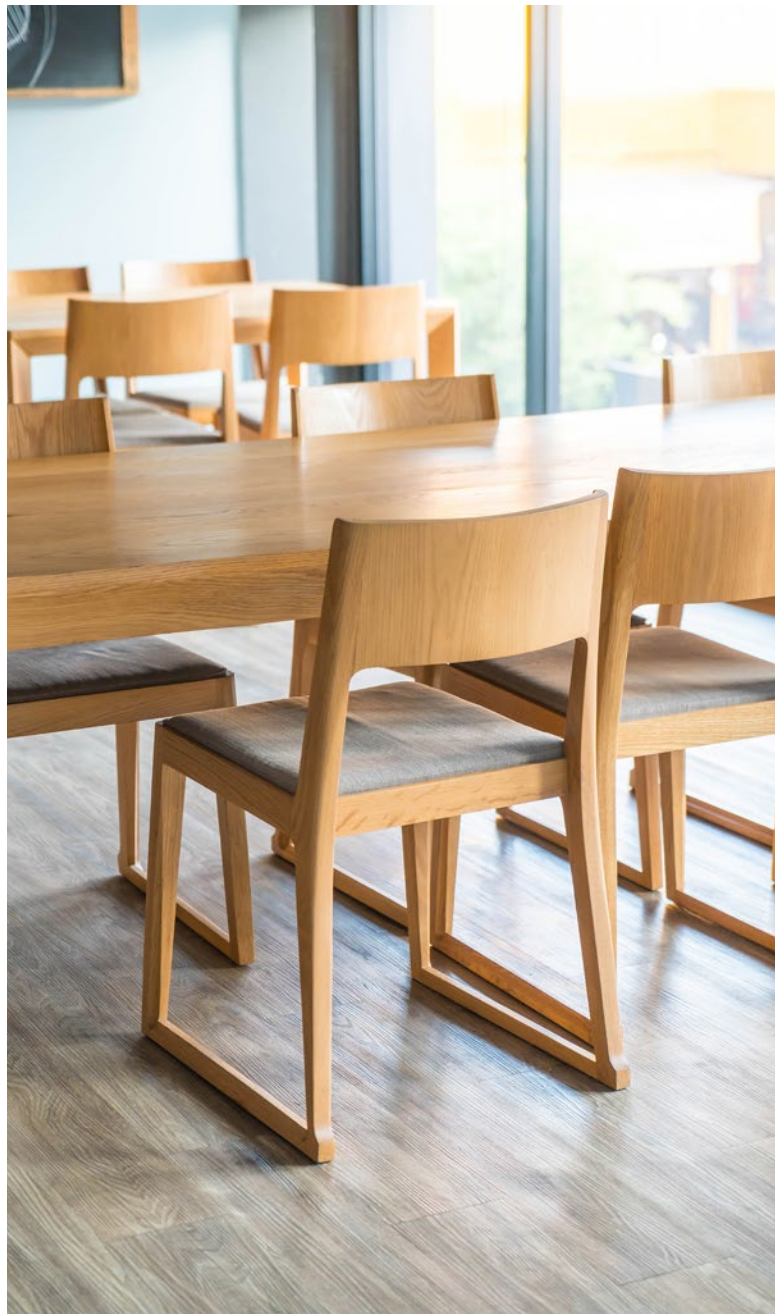

INDUSTRIAL
WOOD COATINGS

710 Forest Avenue • Sheboygan Falls, WI 53085
(920) 467-7850
diamondvogel.com/industrialwood

38956-DV (48837) 09/20